



| MANGUERA SAE 100                      |   |
|---------------------------------------|---|
| USO:                                  | INDUSTRIAL - AGRICOLA                     |
| UTILIZACION:                          | CIRC. HIDRAULICOS                         |
| CARAC: INTERNAS: RESISTENTE AL ACEITE | EXTERNAS: OZONO - ACEITE - ABRASION GRASA |


| SAE 100 R1 AT |                 |                             |
|---------------|-----------------|-----------------------------|
| CODIGO        | DIAM. INT. M.M. | PRESION DE TRABAJO (KG/CM2) |
| 101-3         | 3/16            | 250                         |
| 101-4         | 1/4             | 225                         |
| 101-5         | 5/16            | 215                         |
| 101-6         | 3/8             | 180                         |
| 101-8         | 1/2             | 160                         |
| 101-10        | 5/8             | 130                         |
| 101-12        | 3/4             | 105                         |
| 101-16        | 1"              | 88                          |
| 101-20        | 1 1/4           | 63                          |
| 101-24        | 1 1/2           | 50                          |
| 101-32        | 2"              | 40                          |



| SAE 100 R2 AT |                 |                             |
|---------------|-----------------|-----------------------------|
| CODIGO        | DIAM. INT. M.M. | PRESION DE TRABAJO (KG/CM2) |
| 102-3         | 3/16            | 415                         |
| 102-4         | 1/4             | 400                         |
| 102-5         | 5/16            | 350                         |
| 102-6         | 3/8             | 330                         |
| 102-8         | 1/2             | 275                         |
| 102-10        | 5/8             | 250                         |
| 102-12        | 3/4             | 215                         |
| 102-16        | 1"              | 165                         |
| 102-20        | 1 1/4           | 125                         |
| 102-24        | 1 1/2           | 90                          |
| 102-32        | 2"              | 80                          |




| SAE 100 R4 |                 |                             |
|------------|-----------------|-----------------------------|
| CODIGO     | DIAM. INT. M.M. | PRESION DE TRABAJO (KG/CM2) |
| 104-10     | 5/8             | 24                          |
| 104-12     | 3/4             | 21                          |
| 104-16     | 1"              | 17                          |
| 104-20     | 1 1/4           | 14                          |
| 104-24     | 1 1/2           | 10                          |
| 104-32     | 2"              | 7                           |
| 104-40     | 2 1/2           | 4                           |
| 104-48     | 3"              | 4                           |
| 104-64     | 4"              | 2                           |




SAE 100 R5

| CODIGO | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|--------|--------------------|-----------------------------------|
| 105-3  | 3/16               | 207                               |
| 105-4  | 1/4                | 207                               |
| 105-5  | 5/16               | 155                               |
| 105-7  | 13/32              | 138                               |
| 105-8  | 1/2                | 121                               |
| 105-10 | 5/8                | 103                               |
| 105-14 | 7/8                | 66                                |
| 105-18 | 1 1/8              | 43                                |
| 105-22 | 1 3/8              | 34                                |
| 105-26 | 1 13/16            | 24                                |




SAE 100 R9 R

| CODIGO   | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|----------|--------------------|-----------------------------------|
| 109-R-6  | 3/8                | 475                               |
| 109-R-8  | 1/2                | 440                               |
| 109-R-10 | 5/8                | 390                               |
| 109-R-12 | 3/4                | 350                               |
| 109-R-16 | 1"                 | 310                               |
| 109-R-20 | 1 1/4              | 280                               |
| 109-R-24 | 1 1/2              | 260                               |
| 109-R-32 | 2"                 | 210                               |




SAE 100 R12

| CODIGO | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|--------|--------------------|-----------------------------------|
| 112-6  | 3/8                | 275                               |
| 112-8  | 1/2                | 275                               |
| 112-10 | 5/8                | 275                               |
| 112-12 | 3/4                | 275                               |
| 112-16 | 1"                 | 275                               |
| 112-20 | 1 1/4              | 205                               |
| 112-24 | 1 1/2              | 170                               |
| 112-32 | 2"                 | 170                               |



SAE 100 R13

| CODIGO | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|--------|--------------------|-----------------------------------|
| 113-12 | 3/4                | 345                               |
| 113-16 | 1"                 | 345                               |
| 113-20 | 1 1/4              | 345                               |
| 113-24 | 1 1/2              | 345                               |
| 113-32 | 2"                 | 345                               |




SAE 100 R7 SIMPLE

| CODIGO | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|--------|--------------------|-----------------------------------|
| 107-3  | 3/16               | 475                               |
| 107-4  | 1/4                | 440                               |
| 107-5  | 5/16               | 390                               |
| 107-6  | 3/8                | 350                               |
| 107-8  | 1/2                | 310                               |




SAE 100 R7 DOBLE

| CODIGO  | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|---------|--------------------|-----------------------------------|
| D 107-3 | 3/16               | 475                               |
| D 107-4 | 1/4                | 440                               |
| D 107-5 | 5/16               | 390                               |
| D 107-6 | 3/8                | 350                               |
| D 107-8 | 1/2                | 310                               |

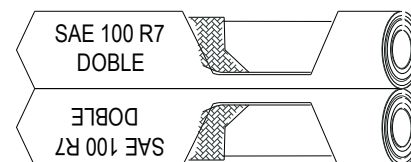

SAE 100 R8 SIMPLE

| CODIGO | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|--------|--------------------|-----------------------------------|
| 108-3  | 3/16               | 350                               |
| 108-4  | 1/4                | 350                               |
| 108-5  | 5/16               | 280                               |
| 108-6  | 3/8                | 245                               |
| 108-8  | 1/2                | 195                               |



SAE 100 R8 DOBLE

| CODIGO  | DIAM. INT.<br>M.M. | PRESION DE<br>TRABAJO<br>(KG/CM2) |
|---------|--------------------|-----------------------------------|
| D 108-6 | 3/8                | 245                               |
| D 108-8 | 1/2                | 195                               |

